

**NOTES**

1. FLAT EVEN SUBSTRATE REQUIRED
2. BASEPLATE SILICONE SEALED TO SUBSTRATE FOR FIRE PROOFING.
3. REFER TO THE CITY OF NEWCASTLE TECHNICAL MANUAL FOR BIN SPECIFICATIONS.
4. MINIMUM OFFSET TO SHARED PATH IS 600mm

BIN ENCLOSURE DOOR IS NOT TO FACE THE STREET. ENSURE ENOUGH CLEARANCE TO OTHER STRUCTURES FOR DOOR OPENING AND BIN REMOVAL

PROPRIETARY BIN TO MANUFACTURERS SPECIFICATIONS.


PROVIDE 4-M12 STAINLESS STEEL G316 CHEMICAL ANCHORS 100 MIN EMBEDMENT TYPICAL

NON SHRINK GROUT TYPICAL. ENSURE LEVEL FOR SEALING FOR FIREPROOFING TO MANUFACTURERS SPECIFICATIONS

PAVING UNITS, CONCRETE OR TURF

FACE OF KERB

KERB AND GUTTER

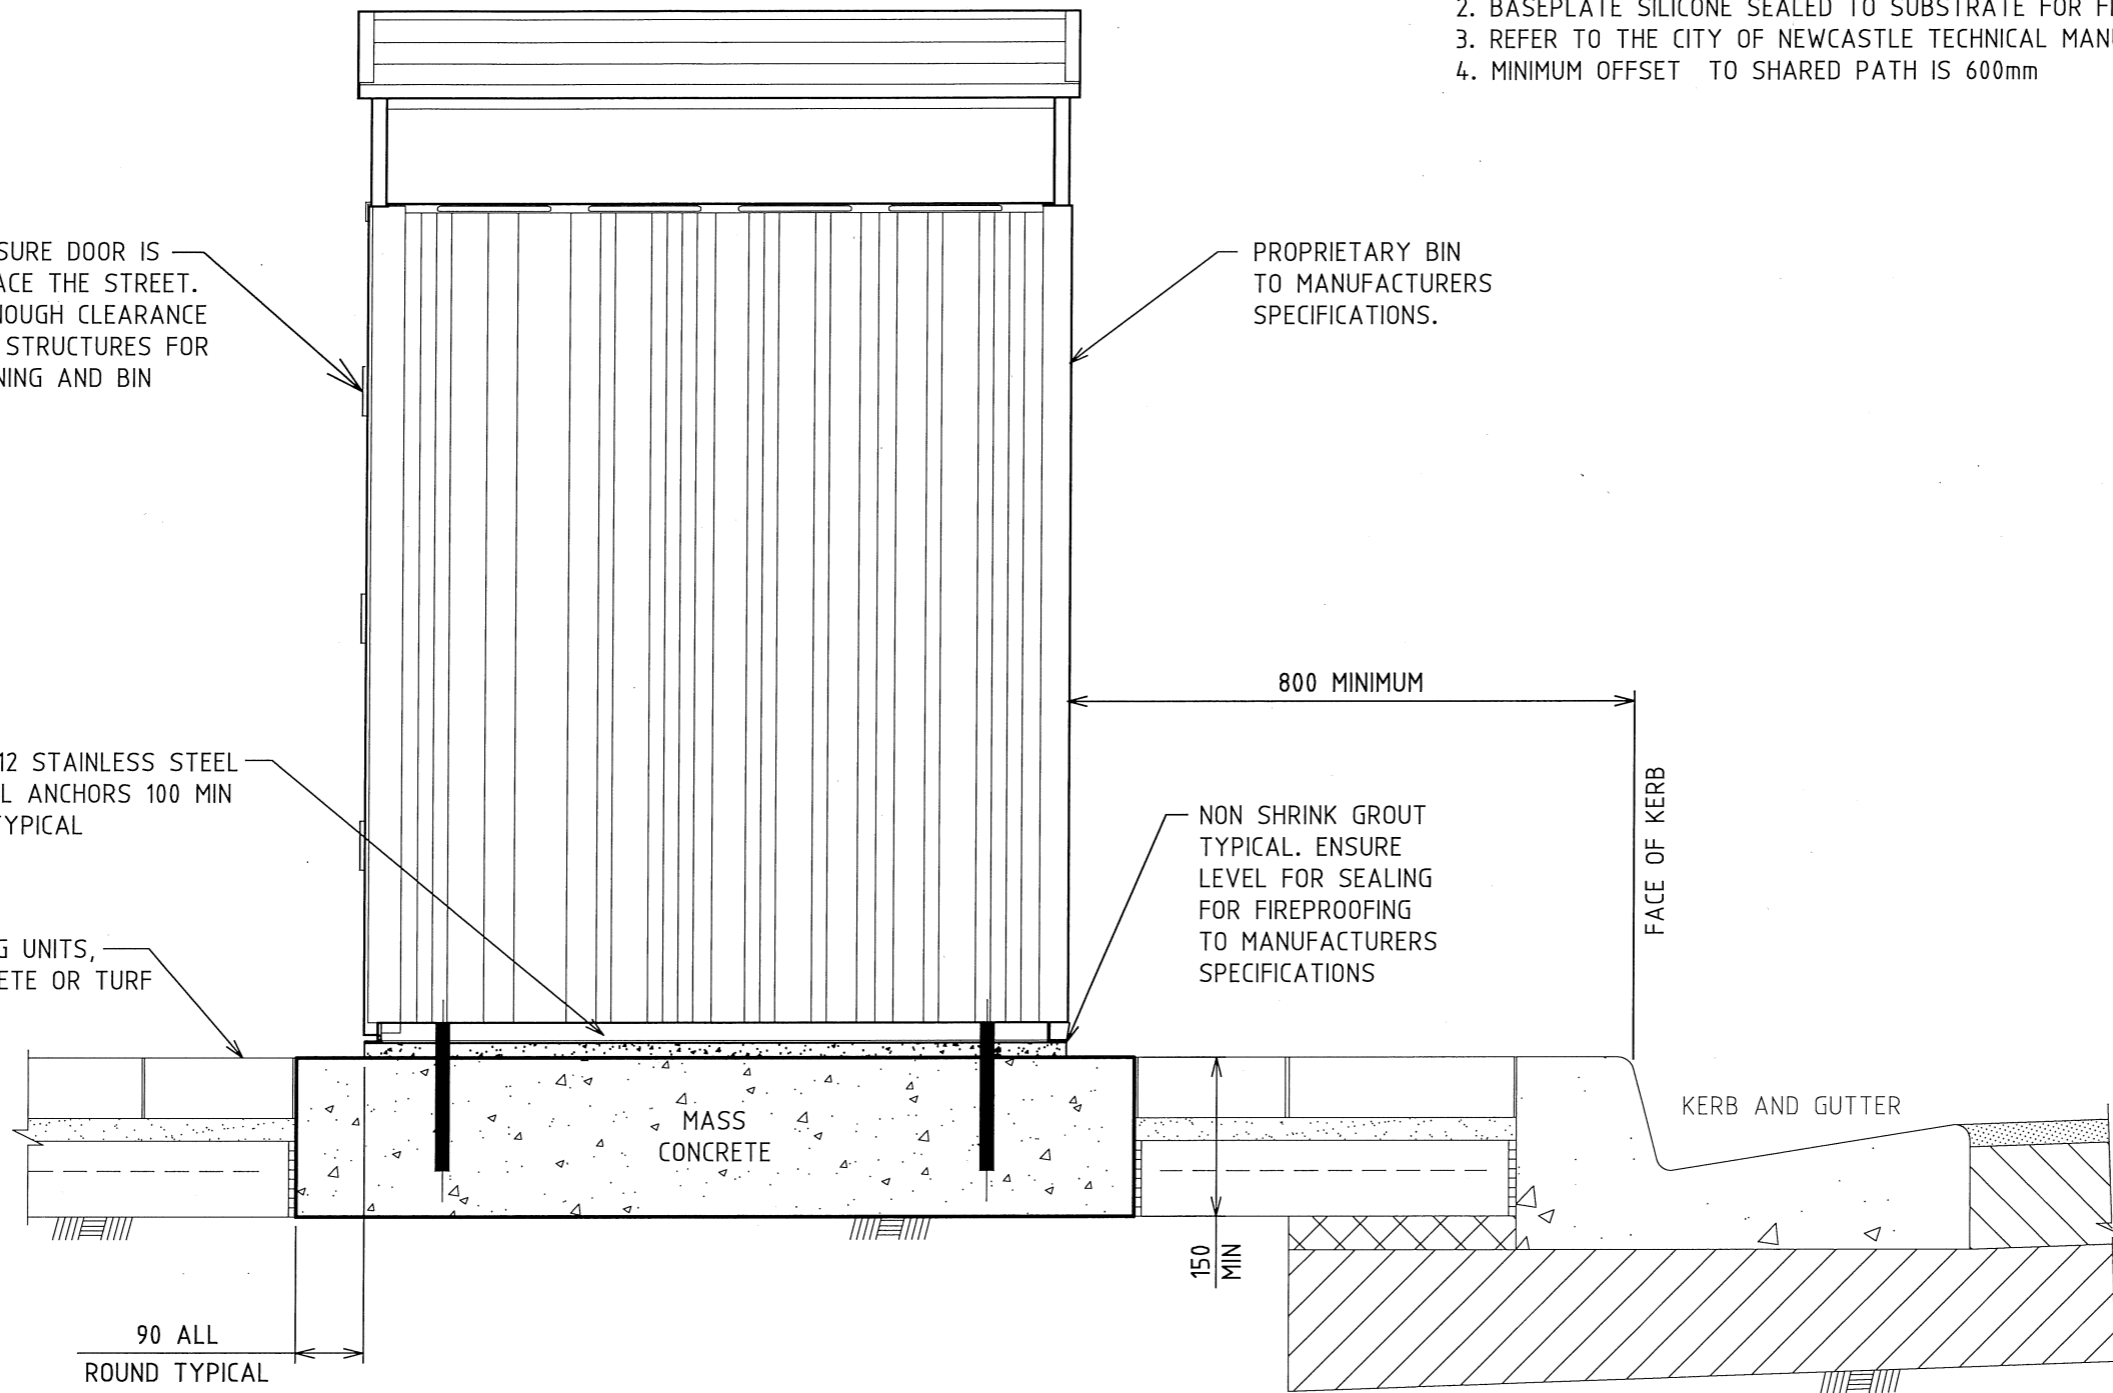

SECTION  
BINS - RUBBISH BIN ENCLOSURE  
SCALE 1:10

				SCALE AS SHOWN	LIVEABLE CITY INFRASTRUCTURE MANAGEMENT SERVICES	APPROVED:	THE CITY OF NEWCASTLE BINS RUBBISH BIN ENCLOSURE	NCC PLAN No. A3660	SHEET No. 1 OF 1 SHEETS
1	CONSTRUCTION	18.12.14	T.A.			SIGNED: <i>[Signature]</i>		INFRASTRUCTURE MANAGEMENT SERVICES MANAGER DATE: 16/11/15	AMENDMENT No.
0	PRELIMINARY	18.11.14	T.A.						
No.	AMENDMENT DETAILS	DATE	INITIALS		REVIEWED: J.C.				
A3 ORIGINAL THIS SHEET WAS PREPARED IN COLOUR AND WILL BE INCOMPLETE IF COPIED				COORDINATE SYSTEM:	HEIGHT DATUM: AHD				